

PUMICE MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037946	60x120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

TAPESTRY PUMICE RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037941	60x120	9,00	PC BIA GL

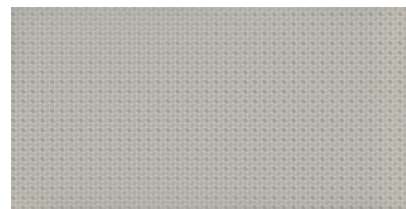

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

DEDALUS POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037622	60x120	10,60	PC BIA GL

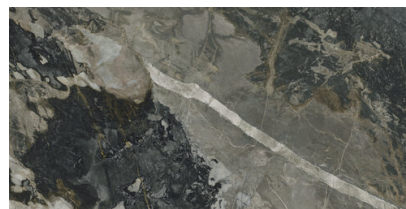

DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5

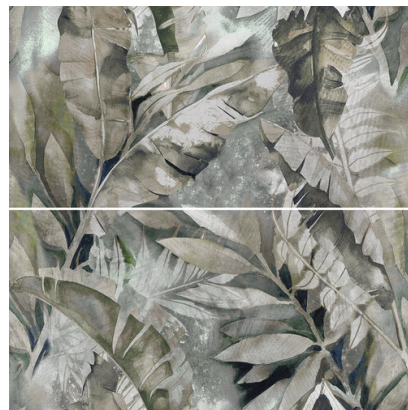

DECOR SET(2) WINTER 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037937	60x120	10,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

TERRACOTTA MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037947	60x120	8,90	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5


ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd)	UNE-EN 16165-C	0.00
----------------------	----------------	------

TAPESTRY TERRACOTTA RECT

60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037940	60x120	10,00	PC BIA GL

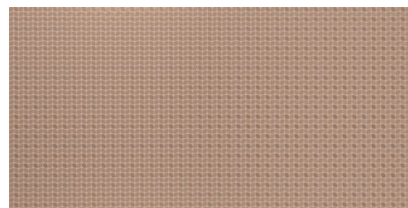

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

FIOR DI PESCO POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037933	60x120	10,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) SUMMER 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037935	60x120	10,70	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

SAP MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037945	60x120	9,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES


Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

ANTI-SLIP CHARACTERISTICS

Slip resistance (Rd) UNE-EN 16165-C 0.00

TAPESTRY SAP RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037942	60x120	0,00	PC BIA GL

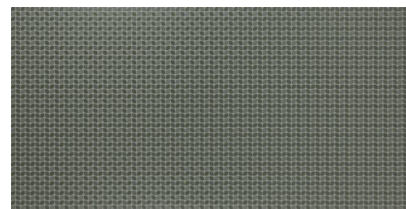

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	III
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

JADORE POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037623	60x120	10,40	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) SPRING 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037938	60x120	10,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

WOAD MATT RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037944	60x120	9,00	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

TAPESTRY WOAD RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037943	60x120	10,20	PC BIA GL

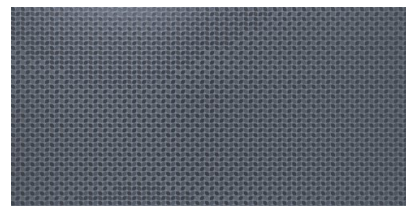

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

BLUE EXPLOSION POL RECT 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037934	60x120	10,50	PC BIA GL



DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 40 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	II
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GLA
Resistance to alcalis	EN ISO 10545-13	GLA
Resistance to cleaning products	EN ISO 10545-13	GA
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GA
Stains resistance	EN ISO 10545-14	5



DECOR SET(2) AUTUMN 60X120

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037939	60x120	9,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

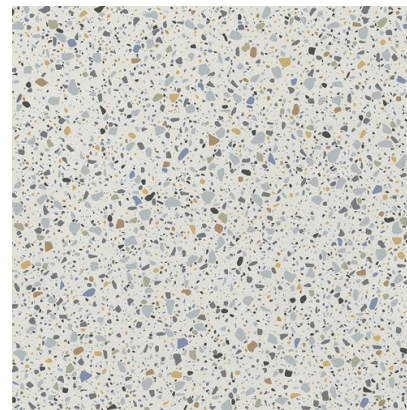

EPOCA WHITE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037920	60X60	8,60	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5



EPOCA BONE SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037921	60X60	8,50	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES


Size, thickness, side straightness, flatness, orthogonality UNE-EN 14411 It accomplished all requirements

PHYSICAL PROPERTIES

Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

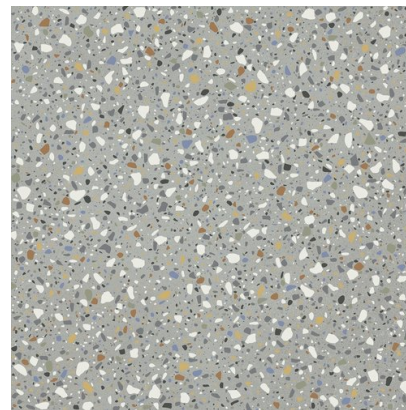

EPOCA GREY SILKEN RECT 60X60

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A037922	60X60	9,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

Size, thickness, side straightness, flatness, orthogonality	UNE-EN 14411	It accomplished all requirements
---	--------------	----------------------------------

PHYSICAL PROPERTIES


Water absorption capacity	EN ISO 10545-03	< 0,5%
Flexion resistance	EN ISO 10545-04	=> 35 N/mm ²
Abrasion resistance (glazed Ceramic)	EN ISO 10545-07	IV
Thermal shock resistance	EN ISO 10545-09	It stands the test
Cracking resistance	EN ISO 10545-11	It stands the test
Frost resistance	EN ISO 10545-12	It stands the test

CHEMICAL PROPERTIES

Resistance to acids	EN ISO 10545-13	GHB
Resistance to alcalis	EN ISO 10545-13	GHB
Resistance to cleaning products	EN ISO 10545-13	GHB
Resistance to chemical products in swimming pool water	EN ISO 10545-13	GHB
Stains resistance	EN ISO 10545-14	5

LAVABO NISO IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040865		0,00	PC BIA GL

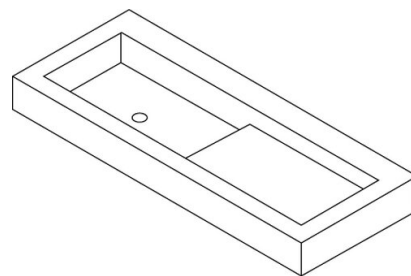

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO NISO DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040866		0,00	PC BIA GL

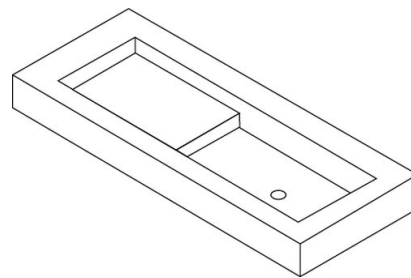

DIMENSIONS AND SURFACE PROPERTIES


PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

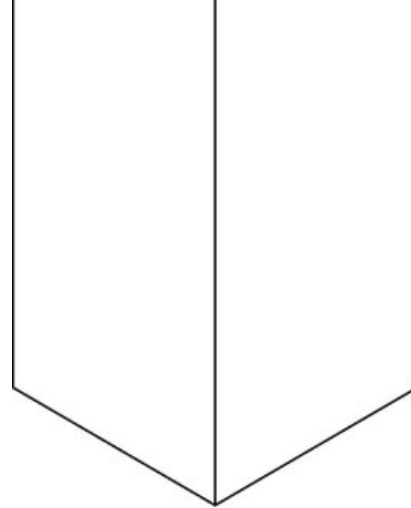

LAVABO DE PIE ROMA

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040867		0,00	PC BIA GL

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO AXEL IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040868		0,00	PC BIA GL

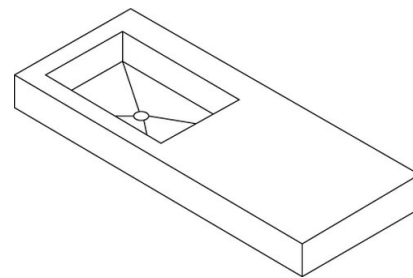

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO AXEL DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040869		0,00	PC BIA GL

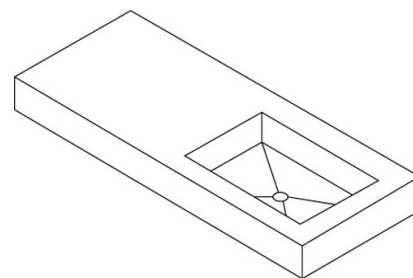

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO AXEL CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040870		0,00	PC BIA GL

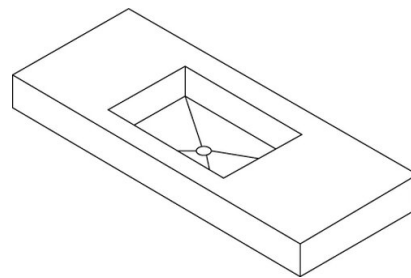

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO AXEL DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040871		0,00	PC BIA GL

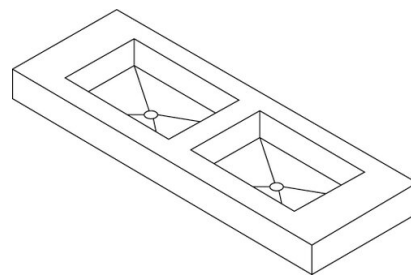

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO ENEA IZQ.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040872		0,00	PC BIA GL

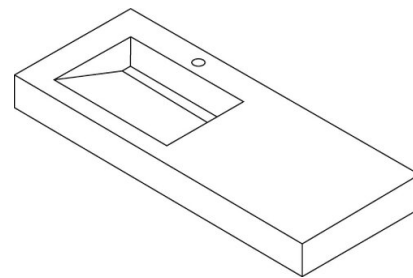

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO ENEA DCHA.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040873		0,00	PC BIA GL

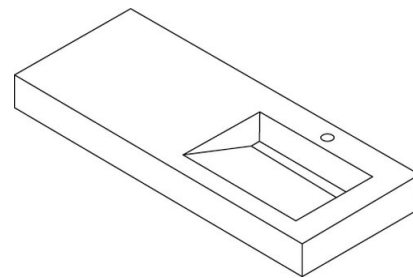

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO ENEA CEN.

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040874		0,00	PC BIA GL

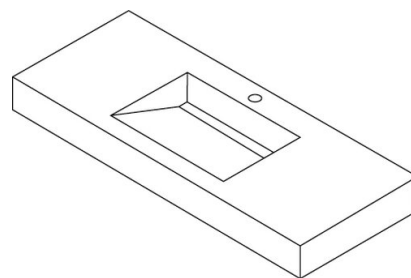

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance


EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES

LAVABO ENEA DOBLE 160

REFERENCE	SIZE (cm)	THICKNESS (mm)	GROUP
A040875		0,00	PC BIA GL

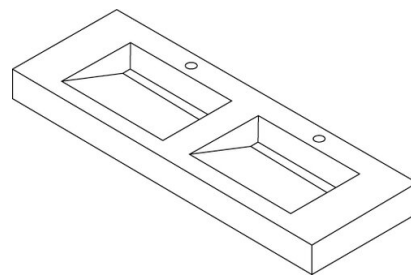

DIMENSIONS AND SURFACE PROPERTIES

PHYSICAL PROPERTIES

Frost resistance

EN ISO 10545-12

It stands the test

CHEMICAL PROPERTIES